

**EC.. EC..D / EC..DM EC..W**


These products are used to monitor the temperature of air or liquids. Applications include heating and air conditioning systems. The liquid filled sensing element enables a rapid response to temperature changes.

Adjustment under the cover  
 Terminals 0.5-2.5mm<sup>2</sup> rising clamps  
 Copper capillary & bulb  
 Volt free contacts  
 Max. ambient -40/+70°C  
 Thermostats may be calibrated by slowly turning the centre nut on the adjusting spindle.  
 Enclosure Flammability UL94-VO


Type	Stages	Range °C	Diff °C	230VAC SPDT	Capillary Length	Bulb mm	Max. Bulb Temp °C	Enclosure
<b>EC-1ML</b>	1	-10/+12	Hand reset open low	15(8)A	1.8m	10 x 100**	200	IP40
<b>EC-2</b>	1	-20/+40	0.5	15(3)A	2m	8 x 140	60	IP43
<b>EC-3</b>	1	-20/+40	1.5	15(6)A	2m	8 x 140	70	IP43
<b>EC-4</b>	1	-20/+40	3.5	15(6)A	2m	8 x 100	180	IP43
<b>EC-5</b>	1	-20/+40	5	15(6)A	2m	8 x 100	180	IP43
<b>EC-6</b>	1	0/100	2	15(4)A	2m	8 x 100	120	IP43
<b>EC-7</b>	1	0/200	5	15(6)A	2m	8 x 70	240	IP43
<b>EC-8</b>	1	0/200	Hand reset open high	15(6)A	2m	8 x 70	240	IP43
<b>EC-3D</b>	1	-15/+45	1.5	15(8)A	rigid stem	includes duct holder	70	IP43*
<b>EC-6D</b>	1	0/70	2	15(8)A	rigid stem	includes duct holder	90	IP43*
<b>EC-6DM</b>	1	30/65	Hand reset open high	15(8)A	rigid stem	includes duct holder	90	IP43*
<b>EC-7DM</b>	1	60/95	Hand reset open high	15(8)A	rigid stem	includes duct holder	115	IP43*
<b>EC-3W</b>	1	-20/+40	1.5	15(6)A	2m	8 x 140	70	IP65
<b>EC-4W</b>	1	-20/+40	3.5	15(6)A	2m	8 x 100	180	IP65
<b>EC-6W</b>	1	0/100	2	15(4)A	2m	8 x 100	120	IP65
<b>EC-7W</b>	1	0/200	5	15(6)A	2m	8 x 70	240	IP65
<b>EC-8W</b>	1	0/200	Hand reset open high	15(6)A	2m	8 x 70	240	IP65

\*Also available with IP65 weatherproof enclosure. \*\*Size/shape differs from other EC.. thermostats - does not fit standard pockets.

**DIMENSIONS**

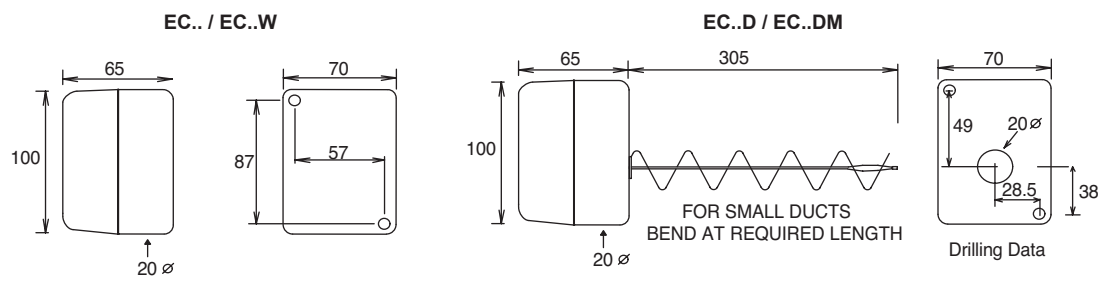

**ACCESSORIES:**

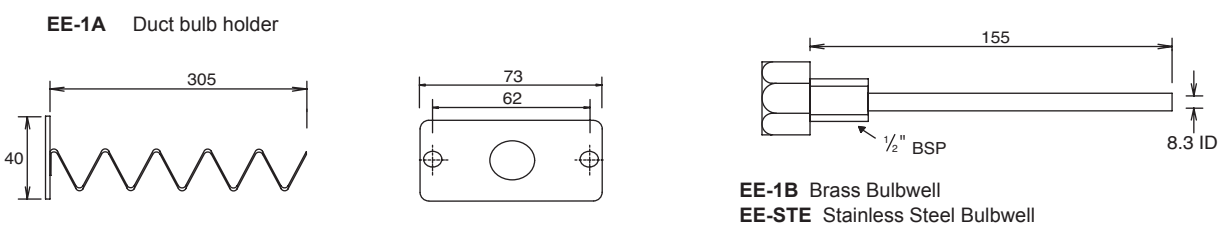

**WIRING:**

