


TRANSFORMERS

E230..

■ Din rail mounting modules used to convert AC and DC voltages.

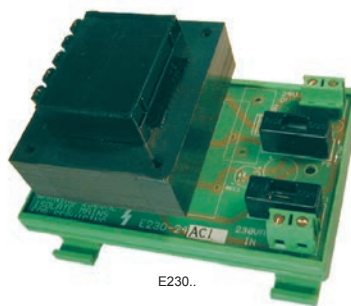


Max Ambient -10/+50 C
 Terminals 0.5-2.5mm rising clamps
 Flammability = UL94-V0
 If fitting inside an enclosure, ensure adequate ventilation is provided as these units can become hot.

Type	Input ±10%	Output ±15%	Primary Fuse Rating	Secondary Fuse Rating	VA	Mounting	Enclosure
E230-24AC1	230VAC	24VAC	315mA (T)	1A (T)	25	Din Rail	IP00
E230-24AC2	230VAC	24VAC	315mA (T)	2A (T)	50	Din Rail	IP00
E230-24AC3	230VAC	24VAC	315mA (T)	3A (T)	75	Din Rail	IP00
E230-24DC1	230VAC	24VAC	315mA (T)	1A (T)	-	Din Rail	IP00

Power supplies with other outputs available to special order

DIMENSIONS

E230..

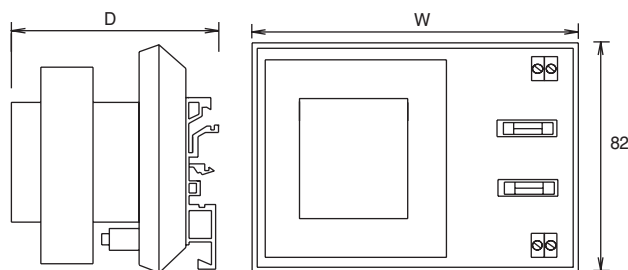

	W	D
E230-24AC1	113	78
E230-24AC2	113	85
E230-24AC3	130	90
E230-24DC1	113	78

ACCESSORIES: EE-M2T Wall mounting enclosure for E230-24AC1. 125H x 125 W x 75D Protection IP65

This enclosure has no ventilation – therefore do not use on loads above 20VA
 DO NOT USE WITH OTHER TRANSFORMERS due to size and ventilation requirements

WIRING:

E230..

